


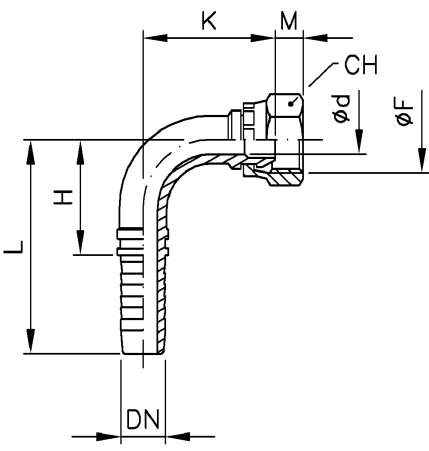

FEMMINA CURVA 90° CONO 60° FILETTO GAS CILINDRICO DADO GRAFFATO	DKR 90° BOGEN 60° KONUS (BSP GEWINDE) PRESSMUTTER	90° BSP FEMALE SWEPT ELBOW 60° CONE CRIMPED BACKNUT	EMBOUT FEMELLE 90° CÔNE 60° BSP CYLINDRIQUE ÉCROU AGRAFE				HEMBRA 90° ROSCA GAS ASIENTO 60° TUERCA SUJEDADA CON GRAPA					
			CODICE ZEICHEN REFERENCE DESCRIPTION CODIGO	Ø Tubo Rohr ID - Hose I.D. Ø Tube - Ø Tubo		Ø F	CH	Ø d	M	H ≈	L ≈	K ≈
				Pollici (1)	mm							
600170404	1/4	6	1/4	19	4	4,5	23	50,5	28			
600170604	1/4	6	3/8	22	4	6	23	50,5	31			
600170605	5/16	8	3/8	22	5,5	6	26	54,5	32,5			
600170606	3/8	10	3/8	22	7	6	30,5	59	37			
600170806	3/8	10	1/2	27	7	6,5	30,5	59	39,5			
600170808	1/2	13	1/2	27	10	6,5	38	68	43,5			
600171010	5/8	16	5/8	28	12,5	9,5	44,5	77,5	51,5			
600171210	5/8	16	3/4	32	12,5	8,5	44,5	77,5	51,5			
600171212	3/4	19	3/4	32	15,5	8,5	54	93	58			
600171612	3/4	19	1"	38	15,5	10,5	54	93	60,5			
600171616	1"	25	1"	38	20	10,5	74	126,5	70,5			
600172016 (2)	1"	25	1" 1/4	50	20	10	74	126,5	78,5			
600172020 (2)	1" 1/4	32	1" 1/4	50	26	10	80	140	88,5			
600172420 (2)	1" 1/4	32	1" 1/2	55	26	12	80	140	91,5			
600172424 (2)	1" 1/2	38	1" 1/2	55	32	12	93	163	103,5			
600173232 (2)	2"	50	2"	70	44	16	129	203,5	124			

(1) Zoll - Inches - Pouces - Pulgadas (2) Dado spinato - Gestiftete mutter - Thrust wire nut - Ecroû à cheville - Tuerca sujedada con perno