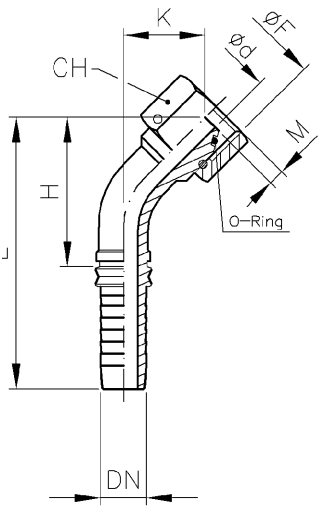


BS STANDARD - INTERLOCK

FEMMINA CURVA 45° O.R. CONO 60° - FILETTO GAS DADO SPINATO	DKOR 45° BOGEN 60° KONUS MIT O-RING (BSP GEWINDE) GESTIFTETE MUTTER	45° BSP O-RING FEMALE ELBOW 60° CONE THRUST-WIRE NUT	EMBOUT FEMELLE 45° BSP 60° - O.R. ECROU A CHEVILLE	HEMBRA 45° ROSCA GAS ASIENITO 60° - O.R. TUERCA SUJEDADA CON PERNO						
	CODICE ZEICHEN REFERENCE DESCRIPTION CODIGO	Ø Tubo Rohr ID - Hose I.D. Ø Tube - Ø Tubo		Ø F	CH	Ø d	H ≈	L ≈	K ≈	M
		Pollici (1)	mm							
	600761212 (2)	3/4	19	3/4	32	14	59	121	28	8,7
	600761616 (2)	1"	25	1"	38	19	81,5	154,5	33	10,5
	600762020	1" 1/4	32	1" 1/4	50	25	95,2	183,5	42	10,1
	600762424	1" 1/2	38	1" 1/2	55	31	110	203,5	48	12,2
	600763232	2"	50	2"	70	42	129	227	51,5	18,1

(1) Zoll - Inches - Pouces - Pulgadas

(2) Dado graffato - Pressmutter - Crimped back nut - Ecrou agrafé - Tuerca sujedada con grapa