


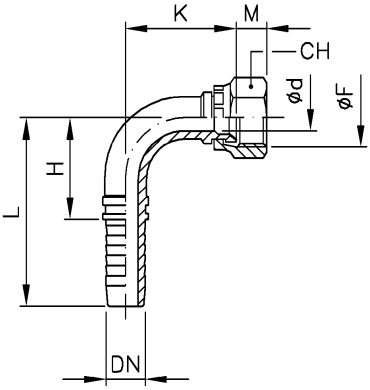

FEMMINA CURVA 90° JIC - SVASATA 74° FILETTO UNF SAE J514 DADO GRAFFATO	DKJ 90° BOGEN 74° DICHT KOPF (UNF GEWINDE NACH SAE J514) PRESSMUTTER	90° JIC FEMALE SWEPT ELBOW 74° CONE - SEAT SAE J514 CRIMPED - BACK NUT	EMBOUT FEMELLE 90° JIC 74° FILET UNF SAE J514 - ECROU AGRAFE	HEMBRA 90° ROSCA UNF ASIENTO JIC-74° SAE J514 TUERCA SUJEDADA CON GRAPA							
		CODICE ZEICHEN REFERENCE DESCRIPTION CODIGO	Ø Tubo Rohr ID - Hose I.D. Ø Tube - Ø Tubo		Ø F	CH	Ø d	H ≈	L ≈	K ≈	M
			Pollici (1)	mm							
600420704	1/4	6	7/16	17	4	23	50,5	26	7,5		
600420804	1/4	6	1/2	19	4	23	50,5	28,5	8,5		
600420904	1/4	6	9/16	19	4	23	50,5	28,5	9,5		
600420905	5/16	8	9/16	19	5,5	26	54,5	30,5	9,5		
600420906	3/8	10	9/16	19	7	30,5	59	35	9,5		
600421206	3/8	10	3/4	24	7	30,5	59	38	11,5		
600421208	1/2	13	3/4	24	10	38	68	42	11,5		
600421406	3/8	10	7/8	27	7	30,5	59	37,5	14		
600421408	1/2	13	7/8	27	10	38	68	41,5	14		
600421410	5/8	16	7/8	27	12,5	44,5	77,5	48	14		
600421710	5/8	16	1" 1/16	32	12,5	44,5	77,5	49,5	14,5		
600421712	3/4	19	1" 1/16	32	15,5	54	93	56	14,5		
600422112	3/4	19	1" 5/16	38	15,5	54	93	59	14,5		
600422116	1"	25	1" 5/16	38	20	74,5	127	69	14,5		
600422620 (2)	1" 1/4	32	1" 5/8	50	26	80	140	84,5	16,5		
600423024 (2)	1" 1/2	38	1" 7/8	55	32	104	174	98	18		

(1) Zoll - Inches - Pouces - Pulgadas (2) Dado spinato - Gestiftete mutter - Thrust wire nut - Ecrou à cheville - Tuerca sujedada con perno